



## AD Access

LASER

Last Updated on 29.08.2018



A compact and competitively priced fume extraction system for light duty laser marking, coding and engraving applications.

The introduction of low cost laser systems has led to the development of an entry level fume extraction solution in order to maintain safe operator working conditions and product quality.

The AD Access combines economic ownership with performance to match the small laser user. A three stage filter condition indicator is included as a standard feature, together with three stage filtration: DeepPleat pre filter, HEPA and chemical section.

### Technology



DeepPleat pre filter



HEPA filter



Advanced carbon filter (ACF) technology



ProTECT service plan



SureCHECK quality standard

### Key features of the AD Access

**Filter condition indicator**  
Standard

**Advanced carbon filter technology (ACF)**  
Standard

**Low noise levels**  
Standard

**VOC gas sensor (Volatile Organic Compound)**  
Optional

**Filter change / System fail signal**  
Optional

**DeepPleat pre filter**  
Standard

**Long life, low cost replacement filters**  
Standard

**Small footprint**  
Standard

**Remote stop / start interface**  
Optional

VODEX Ltd.

Unit 9, Claylands Business park  
Claylands Road, Bishops Waltham  
Southampton, Hampshire, SO32 1QD

W: [www.vodex.co.uk](http://www.vodex.co.uk) - T: +44 (0) 1489 899 070 - E: [sales@vodex.co.uk](mailto:sales@vodex.co.uk)

## Technical specification

1. Unit / Filter condition display

2. On/off switch

3. Filter compartment latch


4. Hose inlet connection - 50mm

5. Signal / Interface cable



6. Power cable inlet

7. Motor cooling inlet

8. Exhaust outlet

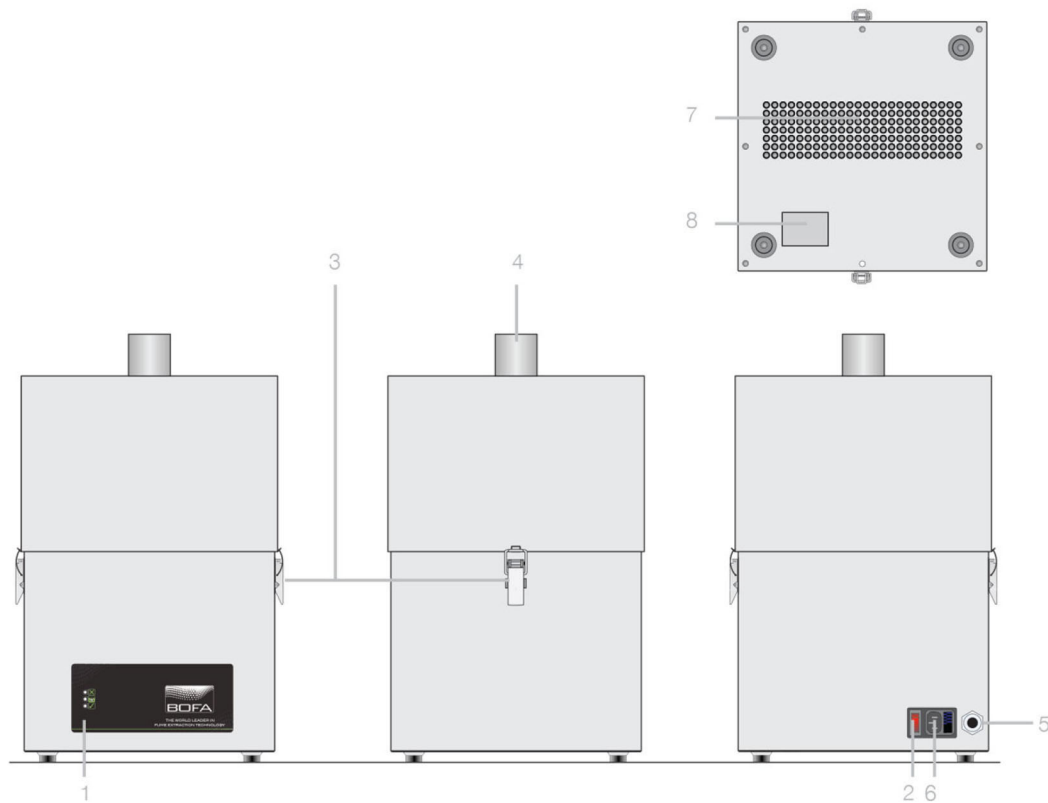

## Airflow through filters

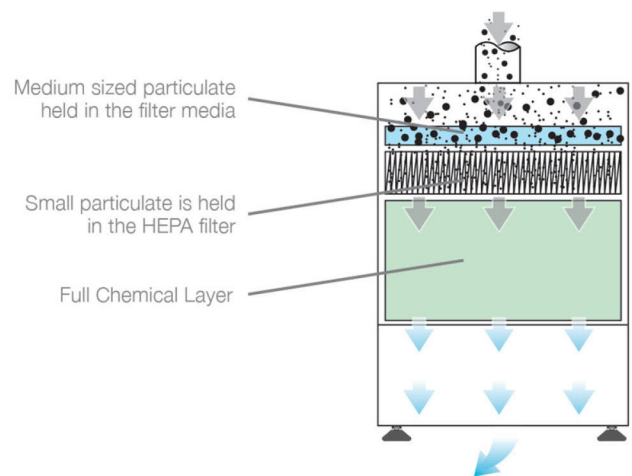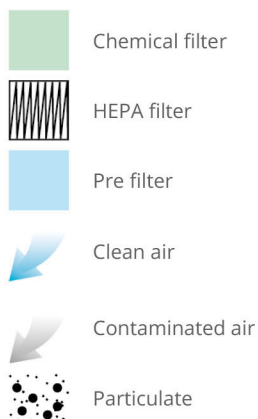

## Technical data

	EU	US
Dimensions (HxWxD)	505 x 335 x 315mm	19.88 x 13.19 x 12.40"
Cabinet construction	Brushed stainless steel / Powder coated mild steel	Brushed stainless steel / Powder coated mild steel
Airflow / Pressure	180m³/hr / 30mbar	106cfm / 30mbar
Electrical data	230v 1ph 50/60Hz Full load current: 0.9 amps / 135 watts	115v 50/60Hz Full load current: 1.2 amps / 135 watts

VODEX Ltd.

Unit 9, Claylands Business park  
Claylands Road, Bishops Waltham  
Southampton, Hampshire, SO32 1QD

W: [www.vodex.co.uk](http://www.vodex.co.uk) - T: +44 (0) 1489 899 070 - E: [sales@vodex.co.uk](mailto:sales@vodex.co.uk)

Technical data		
Noise level	< 61dBA (at typical operating speed)	< 56dBA (at typical operating speed)
Weight	24kg	52.8lbs
Approvals	CE	cUL, UL

DeepPleat pre filter specifications	
Surface media area	1.74m <sup>2</sup> approx (18.7 ft <sup>2</sup> )
Filter media	Glass fibre
Filter media construction	50mm maxi fold construction with webbing spacers (0.16ft)
Filter efficiency	95% @ 0.9 microns

Combined filter specifications	
HEPA filter media	Glass fibre
HEPA media construction	Maxi fold construction with webbing spacers
Filter housing	Zintec mild steel
Treated activated carbon	7kgs approx (15.4 lbs)
Filter efficiency	99.997% @ 0.3 microns

Part numbers						
Model	Voltage	Part no.	24V Stop / Start	Filter change / System failure signal	VOC monitoring	Hose kit
AD Access Stainless steel	230V	L1852A	A2001	A2002	A2003	A1020007
AD Access Powder coated	230V	L1842A	A2001	A2002	A2003	A1020007
AD Access Powder coated	115V	L1841A	A2001	A2002	A2003	A1020007

Replacement filters		
Model	DeepPleat pre filter	Combined HEPA / Gas filter
AD Access	A1030153	A1030154