



MECHANICAL ENGINEERING Dust Extraction Solutions



1000 iQ

High performance **dust and fume extraction system** for industrial applications.

BOFA's DustPRO 1000 iQ high end dust extraction system combines extremely large filter capacity with high airflow and pressure rates, making it the ideal choice for heavy duty applications that generate large amounts of particulate and gaseous organic compounds.

Performance is enhanced with the inclusion of BOFA's acclaimed iQ Operating System taking performance and safety parameters to new levels and ensuring that maintenance, downtime and ownership costs are kept to a minimum.

OPTIONAL FEATURES:

Remote stop / start interface

· Filter change / System fail signal


Larger silencing inlet/out boxes

STANDARD FEATURES:

- iQ Operating System
- High airflow and pressure rates
- Reverse Flow Air filter technology
- Automatic flow control system
- De la contraction de la contra
- · Real time airflow reading
- High contrast display
- · 'Run safe' operation
- · Remote diagnostics via USB
- Independent filter condition monitoring, display and warnings
- HEPA filter
- Filters with long life and low replacement cost

TYPICAL APPLICATIONS:

- PCB Cutting
- Cutting
- Drilling
- Linishing
- Marking
- CNC Engraving
- Routing
- Paper Cleaning
- Paper Processing
- Dental Labs
- Mail Sorting Machines

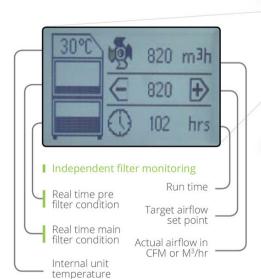





Take a look at the iQ animation, whicl explains exactly why the patented BOF. iQ Operating System provides unrivalled control and data management for you film extraction unit.



Patented Technology - Patent No: GB2 499 812



UNIT		OPTIONS			PART NUMBER
Model	Voltage	24V Stop / Start	Filter change / System failure signal		Part No.
DustPRO 1000 iQ Powder Coated	230V				30811619-1419
		1	1	/	4650811619-1419
	115V	/			10810619-1419
		/	/	/	4660810619-1419


OPTION
Larger exhaust silencing boxes
A1060094


REPLACEMENT FILTERS		
Model	Bag Pre Filter	HEPA Filter
DustPRO 1000 iQ	A1030395	A1030394

TECHNICAL DATA			
	EU	US	
Dimensions (HxWxD)	1197 x 600 x 790mm	47.1 x 23.6 x 31.1"	
Cabinet Construction	Brushed stainless steel / Powder coated mild steel		
Airflow / Pressure	850m³/hr / 100mbar	500cfm / 100mbar	
Electrical Data	230v 1ph 50/60Hz Full load current: 12.8 amps / 2.2kw	115v 60/50Hz Full load current: 19.5 amps / 2.2kw	
Noise Level	< 63dBA (at typical operating speed)		
	< 58dBA - with rear silencing boxes fitted (at typical operating speed)		
Weight	140kgs	309lbs	
Approvals	CE		

BAG PRE FILTER SPE	CIFICATIONS	
Volume Area	100ltrs approx	
Filter Media	Polyester	
Filter Media Construction	8 Pocket Bag Filter	
Surface Media Area	3.9m² approx	
Filter Efficiency	F8 (95% @ 0.9 microns)	

HEPA FILTER SPE	CIFICATIONS	
Surface Media Area	7.5m² approx	
HEPA Filter Media	Glass Fibre	
HEPA Media Construction	Maxi Pleat Construction with Webbing Spacers	
Filter Housing	Zintec Mild Steel	
Filter Efficiency	99.997% @ 0.3 microns	

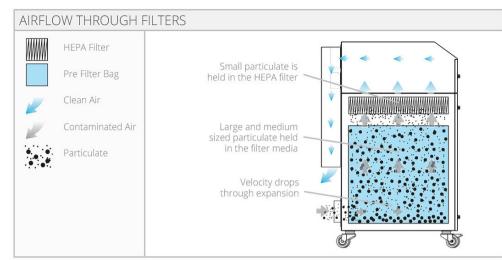

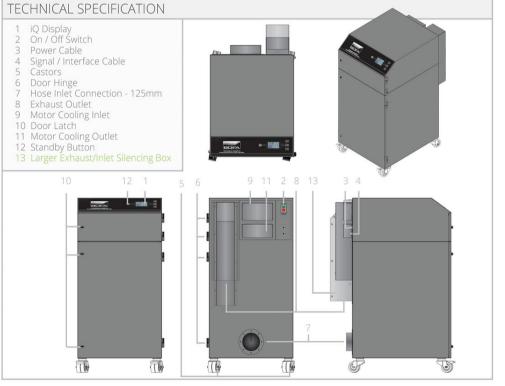





VODEX Ltd.

Unit 9, Claylands Business park Claylands Road, Bishops Waltham Southampton, Hampshire, SO32 1QD

W: www.vodex.co.uk - T: +44 (0) 1489 899 070 - E: sales@vodex.co.uk







